

GF-1550/1551

50G FBG DWDM/OADM Filter




Features:

- Accurate wavelength
- Athermal package
- Flat-top response
- High channel isolation
- Low insertion loss
- Rigid

Center wavelength	C & L band
Center wavelength tolerance @25C	<0.05 nm
Reflectivity	>99.5%
Reflective bandwidth @ -0.5dB	>0.2 nm
Reflective bandwidth @ -25dB	<0.6 nm
Temperature stability -5C ~ 70C	<0.5pm/C
Adjacent channel isolation	> 25dB
Non-adjacent channel isolation	> 30dB

Reflective spectrum

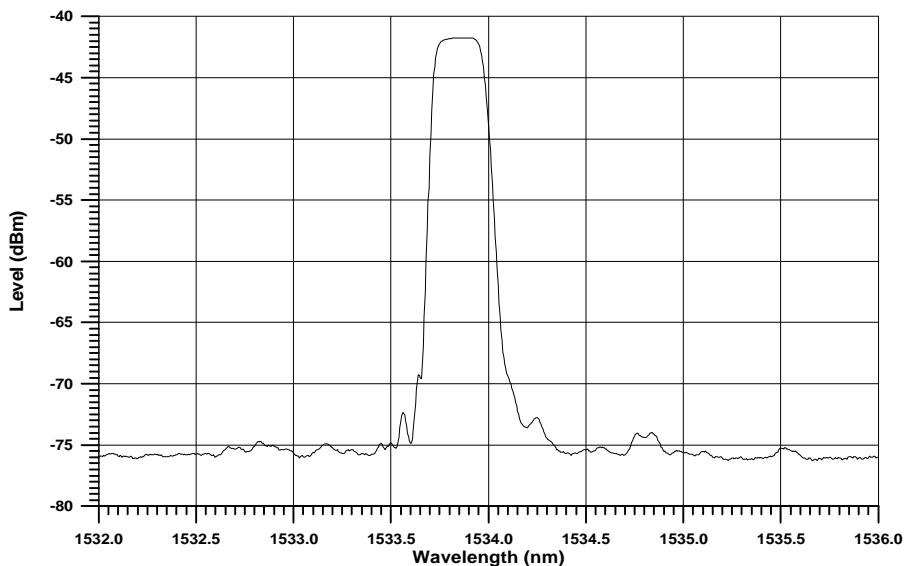

Athermal package temperature response

